


FLOOR PLAN GENERAL NOTES

1. CONTRACTOR TO PREPARE EXISTING FLOOR SUBSTRATE FOR NEW FLOOR FINISH.
2. FILL EXTERIOR WALL CAVITY WITH OPEN CELL SPAY FOAM INSULATION PRIOR TO INSTALLATION OF NEW DRYWALL.
3. FILL INTERIOR WALLS WITH ACOUSTIC BLANKET BETWEEN MEETING ROOMS, RESTROOMS, AND CORRIDORS.
4. REFER TO FINISH SCHEDULE AND INTERIOR ELEVATIONS FOR FINISHES.
5. INSTALL NEW TANKLESS HOT WATER HEATER. COORDINATE FINAL LOCATION IN JANITOR CLOSET WITH ARCHITECT AND OWNER.
6. CLOSET DOORS TO BE REPAINTED AND NEW LOCKSETS ARE TO BE INSTALLED.
7. INSTALL NEW WHITE FACEPLATES ON ALL ELECTRICAL OUTLETS AND SWITCHES. PROVIDE NEW WHITE SWITCHES AND ELECTRICAL OUTLETS AS NECESSARY TO MATCH WHITE FACEPLATES.

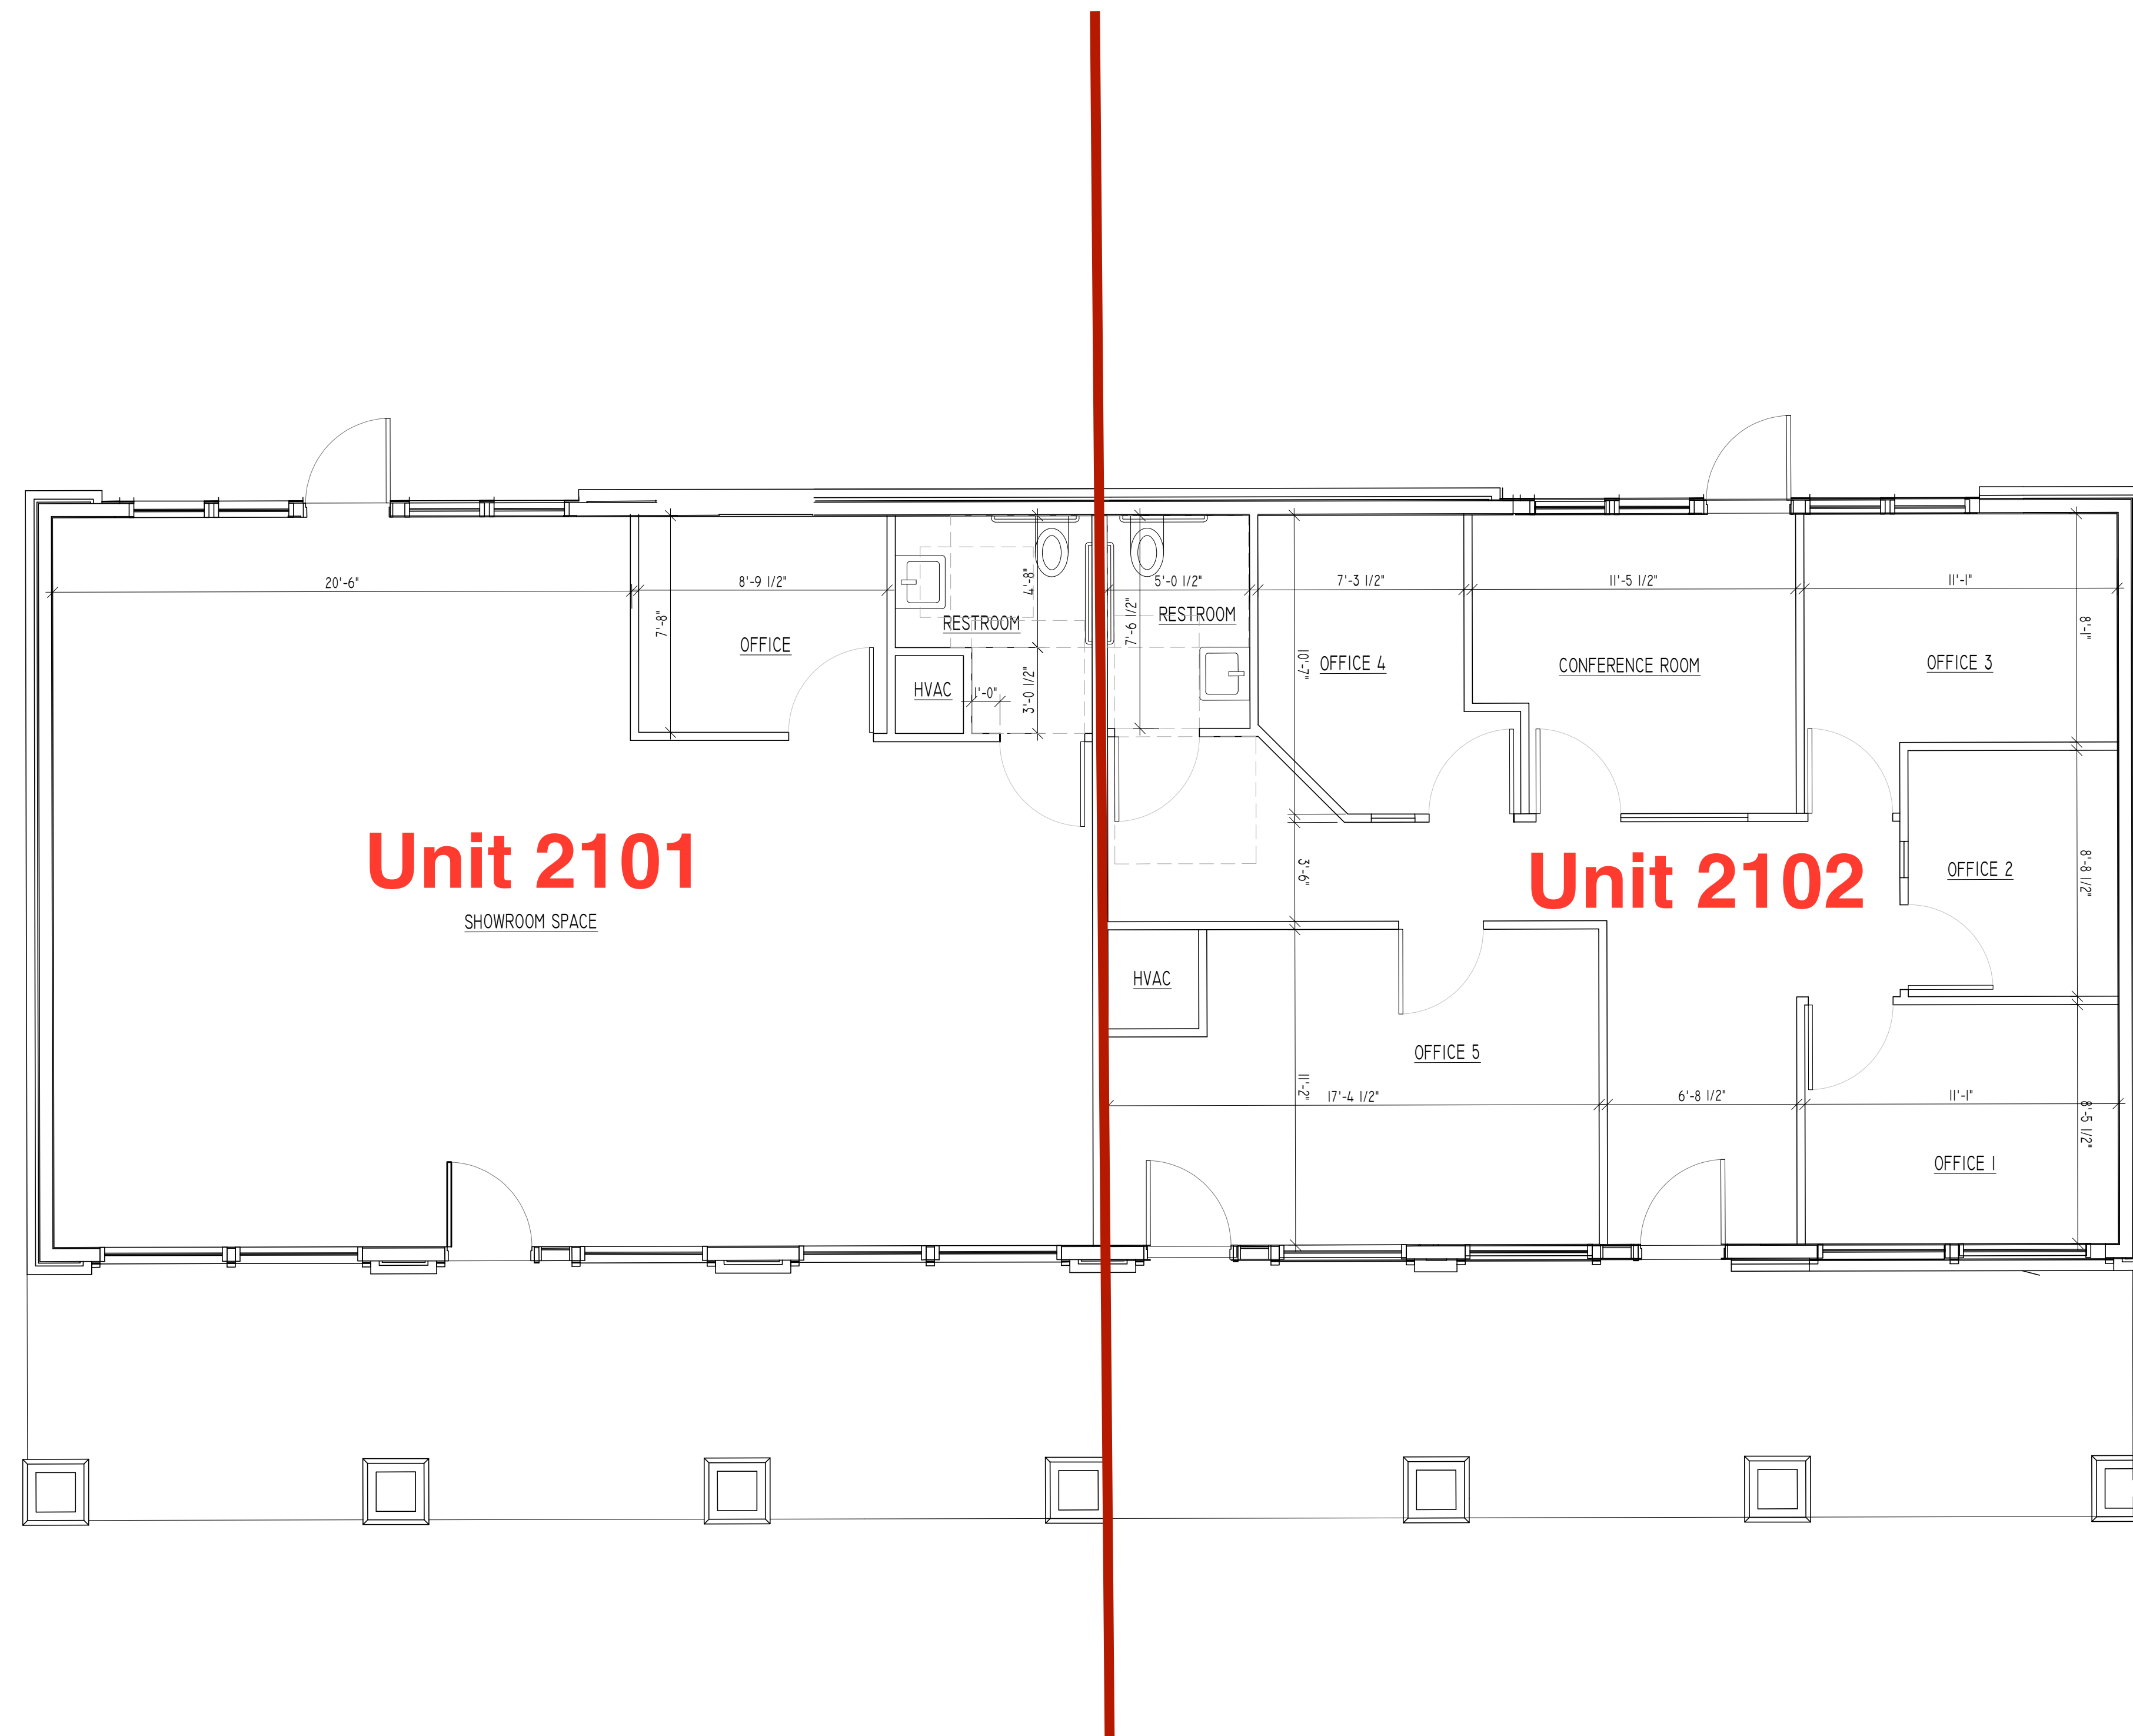

FIRST FLOOR PLAN 1/4"=1'-0"

HACIENDAS DEL RIO
HELOTES, TEXAS

PERMIT DRAWINGS

OCTOBER 11, 2022

A-1